

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number
WO 01/17708 A1

- (51) International Patent Classification: **B21D 19/08**
// 5/02
- (21) International Application Number: PCT/SE00/01559
- (22) International Filing Date: 9 August 2000 (09.08.2000)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
9903143-7 6 September 1999 (06.09.1999) SE
- (71) Applicant (for all designated States except US):
STRÖMSHOLMEN AB [SE/SE]; P.O. Box 216, S-573
23 Tranås (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NORDVALL, Per**
[SE/SE]; Hagadalsgatan 57, S-573 40 Tranås (SE).
- (74) Agents: **WILLQUIST, Bo et al.;** Willquist & Partners
Patentbyrå AB, Platensgatan 9C, S-582 20 Linköping (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AT A PLATE FORMING TOOL

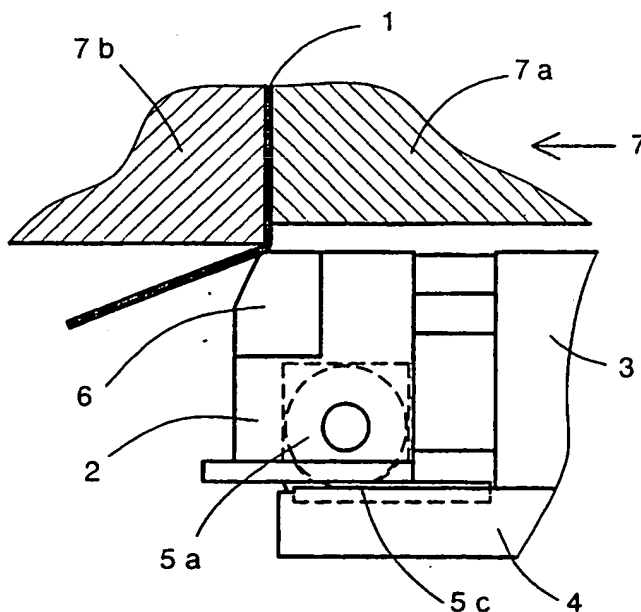

(57) Abstract: Arrangement in a sheet-metal forming tool (7) comprising a first part (2) for performing a reciprocating movement in relation to a second part (4) fixed to a stand. The first part (2) has an element (6) for forming or machining a held sheet (1) by means of a drive arrangement (3). There is a bearing between the parts (2, 4) which has at least one wheel (5a) on a shaft arranged on one of the parts (2). On the remaining part (4) there is a running surface (5c) for the said wheel (5a), the said surface facing the wheel (5a) and defining the movement of the first part (2).